



# INDEPENDENT MODELS

- Assume a linear basis function model for the  $m$ -th target:

$$f_k(\mathbf{x}) = \boldsymbol{\theta}_k^\top \boldsymbol{\phi}(\mathbf{x}),$$

$\boldsymbol{\theta}_k$  is target-specific parameter and  $\boldsymbol{\phi}$  some feature mapping.


- Use this with with large nr of targets.
- We optimize jointly:

$$\min_{\Theta} \|Y - \Phi\Theta\|_F^2 + \sum_{m=1}^I \lambda_m \|\boldsymbol{\theta}_m\|^2,$$

$\|B\|_F^2 = \sqrt{\sum_{i=1}^n \sum_{m=1}^I B_{i,m}^2}$  is Frobenius norm for  $B \in \mathbb{R}^{n \times I}$  and



$$\Phi = \begin{bmatrix} \boldsymbol{\phi}(\mathbf{x}^{(1)})^\top \\ \vdots \\ \boldsymbol{\phi}(\mathbf{x}^{(n)})^\top \end{bmatrix} \quad \Theta = [\boldsymbol{\theta}_1 \quad \cdots \quad \boldsymbol{\theta}_I].$$

Frobenius norm = sum of SSE-s of all targets



# INDEPENDENT MODELS



The experimental results section of a typical MTP paper:

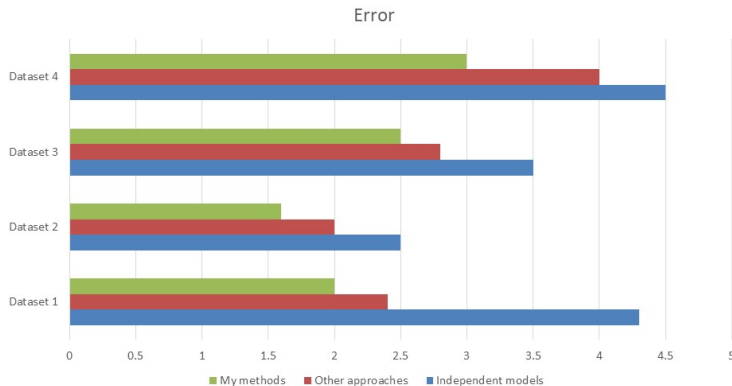

→ Independent models don't exploit target deps, compared to more sophisticated methods, seems to be key for better performance.

# ENFORCING SIMILARITY IN DEEP LEARNING



Commonly-used architecture: weight sharing in the final layer with  $m$  nodes, i.e., weight sharing among the targets

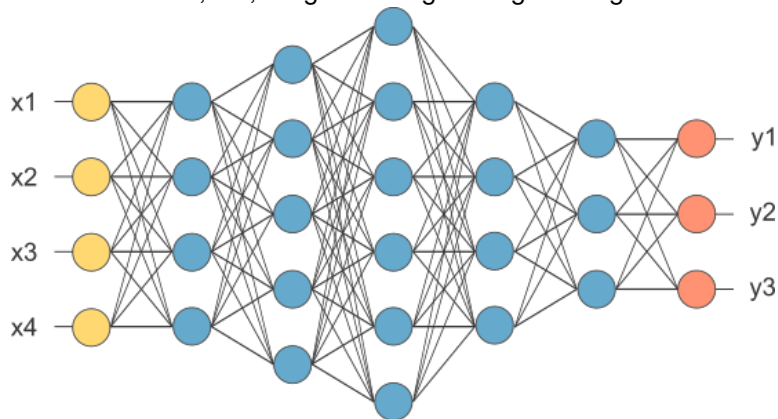

► Caruana, 1997

# MEAN-REGULARIZED MULTI-TASK LEARNING

- Models for similar targets should behave similarly
- So params should be similar

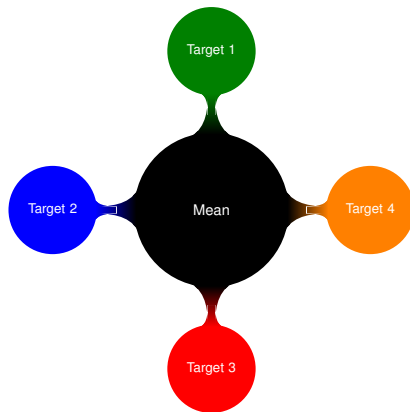

- Approach: Bias parameter vectors towards mean vector:

$$\min_{\Theta} \|Y - \Phi\Theta\|_F^2 + \lambda \sum_{m=1}^l \|\theta_m - \frac{1}{l} \sum_{m'=1}^l \theta_{m'}\|^2$$



# STACKING APPLIED TO MTP



- Level 1: learn all  $f_k(\mathbf{x})$  independently
- Level 2: learn model for each target independently, using predictions of level 1  $\rightsquigarrow$

$$f(\mathbf{x}) = g(f_1(\mathbf{x}), \dots, f_l(\mathbf{x}))$$

Or:

$$f(\mathbf{x}) = g(f_1(\mathbf{x}), \dots, f_l(\mathbf{x}), \mathbf{x})$$

- Advantages: easy to implement and general
- Has been shown to avoid overfitting in multivariate regression
- If level 2 learner uses regularization  $\rightsquigarrow$  models are forced to learn similar parameters for different targets.

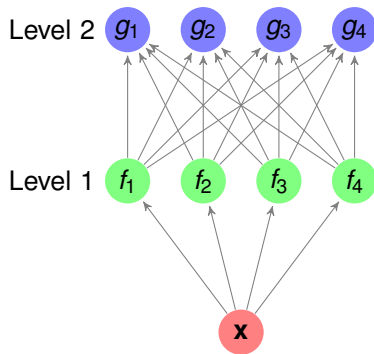

► Cheng and Hüllermeier, 2009

## STACKING VS BINARY RELEVANCE: EXAMPLE

- Compare F1-Score of random forest with stacking vs random forest with binary relevance on different multilabel datasets:

	birds	emotions	enron	genbase	image	langLog	reuters	scene	slashdot	yeast
BR(rf) F1-Score	0.637	0.620	0.578	0.989	0.431	0.319	0.671	0.616	0.441	0.615
STA(rf) F1-Score	0.646	0.634	0.583	0.986	0.446	0.317	0.685	0.633	0.453	0.624

- F1-Score is decomposed over targets.
- NB: Stacking slightly outperforms binary relevance on average.
- For more details, please refer to [Probst et al., 2017](#).

